3050 Spruce Street, St. Louis, MO 63103 USA
Tel: (800) 521-8956 (314) 771-5765 Fax: (800) 325-5052 (314) 771-5757
email: techservice@sial.com sigma-aldrich.com

Product Information

Cocaine hydrochloride solution 1.0 mg/mL±5% in methanol drug standard

Catalog Number **C1528**Lot Number 070M8728
Storage Temperature 2–8 °C

CAS RN 53-21-4

Synonyms: 3-(Benzoyloxy)-8-azabicyclo-[3.2.1]octane-2-caboxylic acid methyl ester hydrochloride; I-Cocaine hydrochloride; Ecgonine methyl ester benzoate hydrochloride; Benzoylmethylecgonine hydrochloride

Product Description

Molecular Formula: C₁₇H₂₁NO₄ ⋅ HCl

Molecular Weight: 339.81

DEA Class: Exempt preparation of Class II

Concentration: 1.12 mg of cocaine hydrochloride (equivalent to 1.00 mg of free base)/mL of GC grade methanol, concentration verified by UV.

Expiration Date: December 2016

Precautions and Disclaimer


This product is for R&D use only, not for drug, household, or other uses. Please consult the Material Safety Data Sheet for information regarding hazards and safe handling practices.

Storage/Stability

Store the product at 2–8 $^{\circ}$ C. If stored at 2–8 $^{\circ}$ C in an airtight container, protected from light, decomposition of the product is less than 1% in 24 months. After opening, concentration may change due to loss of solvent.


CMW.MAM 10/10-1

70 eV Electron Ionization Mass Spectrum

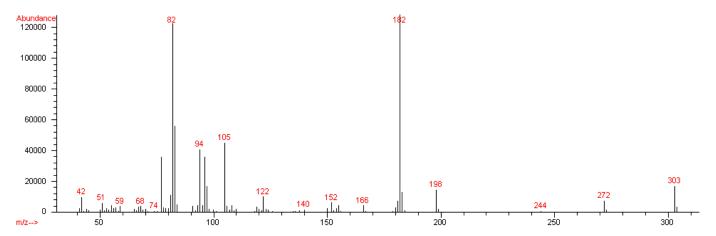

Hewlett-Packard 5890 Series II Gas Chromatograph Hewlett-Packard 5971 Mass Selective Detector Hewlett-Packard G1034C MS ChemStation (HP-DOS series)

FT-IR

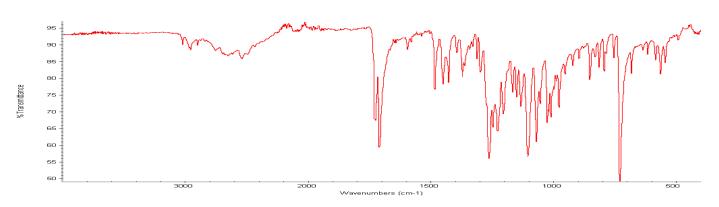

Nicolet 380 FT-IR Thermo Smart Orbit

Ultraviolet Spectrum

 Peak
 232.0 nm


 Absorbance
 0.9817


Solvent 0.2 N Sulfuric acid

Dilution 1:49 (v/v)

Capillary Gas Chromatography

Column Supelco SPB-1 (Catalog Number 24162)
I.D. 0.20 mm Length 15 m Film Thickness 0.20 μm
Oven Temperature 50 °C (2 minutes), then
15 °C/minute to 300 °C, hold 11 minutes
Injector Temperature 250 °C, Split
Detector Hewlett-Packard 5971
Mass Selective Detector (70 eV, 40-500 m/z)

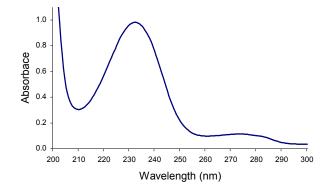

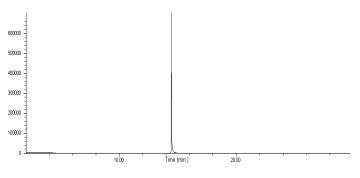

Hewlett-Packard 5890

Beckman-Coulter DU 800