


# NovaSeptum® GO Port Plug

## Product Description

The NovaSeptum® GO port plug is designed to fit in any unused ports in a magazine that does not need to be fully loaded with NovaSeptum® GO sampling units. A certificate of quality is available on our website.

**Port Plug (2 mm)**

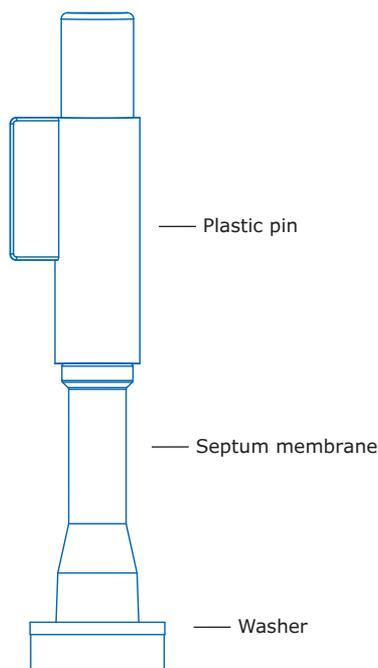

## Specifications

Materials of Construction	
Septum membrane	Medical-grade platinum-cured silicone
Washer	Stainless steel
Plastic Pin	Polyester
Environmental	
Maximum Operating Pressure	6.00 bar (g) (87 psi)
Maximum Operating Temperature	Up to 230 °C (446 °F)
Traceability	The product and packaging label includes the catalog and lot number as well as the expiration date.
Sterilization	Non-sterile.
Component Material Toxicity	All wetted component materials meet the criteria for Class VI testing based on USP <88> Biological Reactivity, in vivo.
Assembly	This product is manufactured in a cleanroom environment complying with class 8 according to ISO® 14644-1.
Packaging	Ten port plugs are packaged in a sealed inner plastic bag. Ten of these bags, with a total of 100 port plugs, are placed in a sealed outer bag and then in a cardboard box.

## Ordering Information

### NovaSeptum® GO Port Plug

Application	Qty/pk	Cat. No.
Sampling	100	E202