


Specification Sheet

NovAseptic® Valve, Valve Body, Tank Outlet Valve 180°, Elbow 45°

Product Description

The NovAseptic® valve is specifically designed for aseptic applications and complies with the most stringent cleanability and sterilization requirements. The focus on aseptic design is a significant feature for all valves. The NovAseptic® valve is designed for minimum dead leg, complete drainability and high chemical resistance.

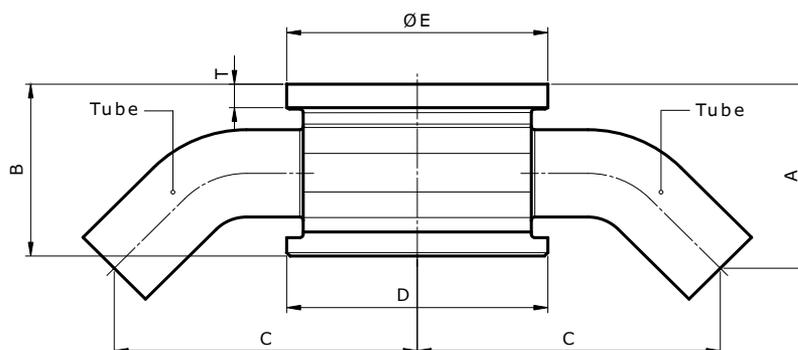

Catalogue No. Structure

NU###/452-321

= tube size

Nominal Dimensions in mm (in.)

Catalogue No.	A	B	C	D*	E	T	Size	Tube Size
NU050/452-321	30.0 (1.181)	31.5 (1.240)	50.0 (1.969)	TR40x2	40.0 (1.575)	6.4 (0.252)	1/2"	12.7 x 1.65 (0.50 x 0.065)
NU075/452-321	46.0 (1.811)	39.0 (1.535)	89.0 (3.504)	TR55x2	55.0 (2.165)	7.2 (0.283)	3/4"	19.1 x 1.65 (0.75 x 0.065)
NU100/452-321	54.0 (2.126)	50.0 (1.969)	87.0 (3.425)	TR75x2	75.0 (2.953)	6.8 (0.268)	1"	25.4 x 1.65 (1.0 x 0.065)
NU150/452-321	71.0 (2.795)	64.0 (2.520)	107.0 (4.213)	TR85x2	85.0 (3.346)	6.9 (0.272)	1 1/2"	38.1 x 1.65 (1.5 x 0.065)
NU200/452-321	82.0 (3.228)	77.0 (3.031)	131.5 (5.177)	TR109x2	110.0 (4.331)	6.7 (0.264)	2"	50.8 x 1.65 (2.0 x 0.065)
NU300/452-321	116.0 (4.567)	115.0 (4.528)	189.5 (7.460)	TR146x2	150.0 (5.906)	10.0 (0.394)	3"	76.2 x 1.65 (3.0 x 0.065)

* Non-standard thread, special thread to fit NovAseptic® actuators.

Specifications

Net Volume (valve cavity, diaphragm applied)						
Valve Body	NU050	NU075	NU100	NU150	NU200	NU300
Volume mL	4	10	30	80	200	470

Net Weight (approximate)						
Valve Body	NU050	NU075	NU100	NU150	NU200	NU300
Weight kg (lb)	0.2 (0.44)	0.5 (1.1)	1.0 (2.20)	1.4 (3.09)	2.8 (6.17)	7.4 (16.3)

Material						
	Bar			Tubing		
	Stainless Steel in Compliance with			Stainless Steel in Compliance with		
Material Code	316L		EN 1.4435	TP316L		EN 1.4435
Technical Requirements	ASME® SA-479		EN 10272	ASTM® A269/270		EN 10217-7/EN 10216-5

Specifications	
Surface Roughness	Internal surface (Electropolished) Ra ≤ 0.38 µm (15 µin) External surface Ra ≤ 1.6 µm (63 µin)
Design Temperature, Valve Body	-80 to 200 °C (-112 to 392 °F)
Design Pressure, Valve Body	-1.03 to 10 bar(g) (-15 to 145 psi(g))
Note	The weakest component in the assembled product determines the maximum operating/design temperature and pressure limits. The applied diaphragm and actuator have different design temperature and/or pressure limits. The valve body can only be used with NovAseptic® diaphragm, actuator and position indicator (optional).
Labeling	Each valve body is individually marked for full traceability and heat No. according to our QA routines.
Packaging	All open ends on the valve body are protected with plastic covers on delivery and packaged in a closed box.
Quality Control	Our quality assurance system guarantees the control and traceability at all stages of the manufacturing.
Regulatory	<ul style="list-style-type: none"> The NovAseptic® valves, used with gas group 2 and liquid group 1, fall under the art. 4 § 3 of the Pressure Equipment Directive (2014/68/EU). They are not CE marked. However, the design has been evaluated for assembly by welding at a bottom of a vessel with a max allowable pressure of 10 bar and a max allowable temperature of 200 °C, with gas group 2 and liquid group 1. NovAseptic® valves follow the applicable ASME BPE guideline sections.
Options	For non-standard NovAseptic® valve body options, please contact us for further information.

Technical Assistance

For more information, please visit [SigmaAldrich.com](https://www.sigmaaldrich.com) for up-to-date worldwide contact information

