


Catalogue Number:
NA##/39-222 and
NU###/39-222

Specification Sheet

NovAseptic® Valve, Valve Body, Divert Valve TC

Product Description

The NovAseptic® valve is specifically designed for aseptic applications and complies with the most stringent cleanability and sterilization requirements. The focus on aseptic design is a significant feature for all valves. The NovAseptic® valve is designed for minimum dead leg, complete drainability and high chemical resistance.

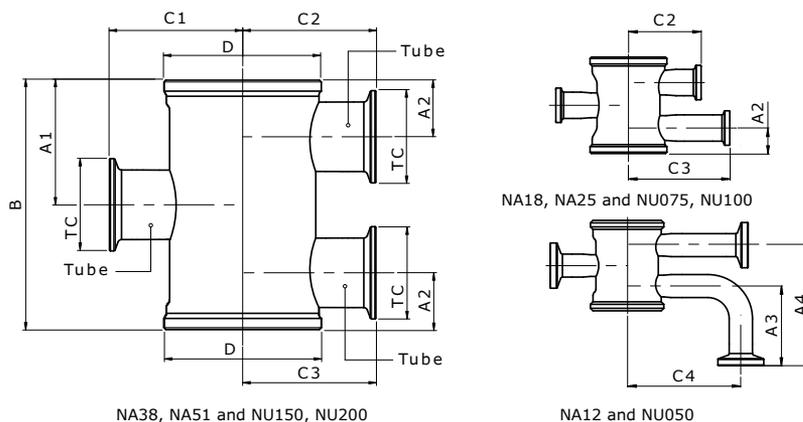

NA38, NA51 and NU150, NU200

NA12 and NU050

Catalogue No. Structure

NA##/39-222

NU###/39-222

= NA tube size


= NU tube size

Nominal Dimensions in mm (in.)

Catalogue No.	A1	A2	A3	A4	B	C1	C2	C3	C4	D*	TC	SMS Tube	US Tube ASTM®
												3008	A269/270
												Tube Size	Tube Size
NA12/39-222	25.0	13.7	44.0	66.6	50.0	42.0	66.0	-	62.0	TR40x2	25.0	12.0 x 1.0	
NU050/39-222	(0.984)	(0.539)	(1.732)	(2.622)	(1.969)	(1.653)	(2.598)		(2.441)		(0.984)		12.7 x 1.65 (0.50 x 0.065)
NA18/39-222	35.0	18.5	-	-	70.0	52.0	52.0	72.5	-	TR55x2	25.0	18.0 x 1.5	
NU075/39-222	(1.378)	(0.728)			(2.756)	(2.047)	(2.047)	(2.854)			(0.984)		19.1 x 1.65 (0.75 x 0.065)
NA25/39-222	48.5	24.5	-	-	97.0	62.0	62.0	102.0	-	TR75x2	50.5	25.0 x 1.2	
NU100/39-222	(1.909)	(0.965)			(3.819)	(2.441)	(2.441)	(4.016)			(1.988)		25.4 x 1.65 (1.0 x 0.065)
NA38/39-222	68.3	31.2	-	-	136.5	72.0	72.0	72.0	-	TR85x2	50.5	38.0 x 1.2	
NU150/39-222	(2.689)	(1.228)			(5.374)	(2.835)	(2.835)	(2.835)			(1.988)		38.1 x 1.65 (1.5 x 0.065)
NA51/39-222	87.8	37.7	-	-	175.5	95.0	95.0	95.0	-	TR109x2	64.0	51.0 x 1.2	
NU200/39-222	(3.457)	(1.484)			(6.909)	(3.740)	(3.740)	(3.740)			(2.520)		50.8 x 1.65 (2.0 x 0.065)

* Non-standard thread, special thread to fit NovAseptic® actuators.

Recommended orientation for full drain ability of NovAseptic® diaphragm valves

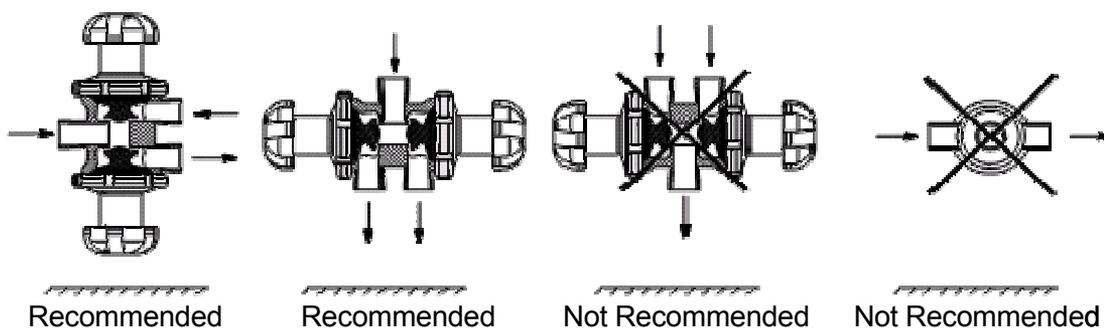

Specifications

Net Volume (valve cavity, diaphragm applied)					
Valve Body	NA12/NU050	NA18/NU075	NA25/NU100	NA38/NU150	NA51/NU200
Volume mL	7	20	60	160	480

Net Weight (approximate)					
Valve Body	NA12/NU050	NA18/NU075	NA25/NU100	NA38/NU150	NA51/NU200
Weight kg (lb)	0.2 (0.44)	0.5 (1.1)	1.3 (2.87)	2.4 (5.29)	4.8 (10.6)

Material					
	Bar Stainless Steel in Compliance with			Tubing Stainless Steel in Compliance with	
Material Code	316L	EN 1.4404		TP316L	EN 1.4404
Technical Requirements	ASME® SA-479	EN 10272		ASTM® A269/270	EN 10217-7/EN 10216-5

Specifications	
Surface Roughness	Internal surface (electropolished) $Ra \leq 0.38 \mu\text{m}$ (15 μin) External surface $Ra \leq 1.6 \mu\text{m}$ (63 μin)
Design Temperature, Valve Body	-80 to 200 °C (-112 to 392 °F)
Design Pressure, Valve Body	-1 to 10 bar(g) (-14.5 to 145 psi(g))
Note	The valve body can only be used with NovAseptic® diaphragm, actuator, and position indicator (optional). The applied diaphragm and actuator have different design temperature and/or pressure limits. The weakest component in the assembled product determines the maximum operating/design temperature and pressure limits.
Labeling	Each valve body is individually marked for full traceability and heat No. according to our QA routines.
Packaging	All open ends on the valve body are protected with plastic covers on delivery and packaged in a closed box.
Quality Control	Our quality assurance system guarantees the control and traceability at all stages of the manufacturing.
Regulatory	<ul style="list-style-type: none"> The NovAseptic® valves, used with gas group 2 and liquid group 1, fall under the art. 4 § 3 of the Pressure Equipment Directive (2014/68/EU). They are not CE marked. They have been designed and manufactured following the sound engineering practices. NovAseptic® valves follow the applicable ASME BPE guideline sections.
Options	For non-standard NovAseptic® valve body options, please contact us for further information

Technical Assistance

For more information, please visit [SigmaAldrich.com](https://www.sigmaaldrich.com) for up-to-date worldwide contact information

